




CALL POINT - KEY SWITCH

KEY SWITCHES

An expanded range of key switches that complement our market leading range of access control solutions.



KS-CP

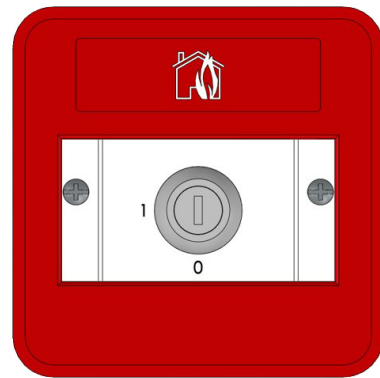

SPECIFICATION

- KS-CP**
- Latching on/off operation
 - Key removal in both positions
 - Keyed alike
 - Supplied with 2 x keys (A126)
 - Voltage free contacts
 - Contact Rating: 4A 125VAC & 2A 250VAC
 - Contact Rating: 2A 12/24VDC
 - Operating Temp: -20 to +55C
 - Rated IP54 ingress protection
 - Etched legend (0 - 1)
 - Security screws
- KS-CP-S**
- Single Pole - Normally Open/Normally Closed
- KS-CP-D**
- Double Pole / Double Throw (NO/NC)

DIMENSIONS

- KS-CP**
- 90x90x55/45 (mm) (HxWxD)
 - 260g (Boxed)
 - 212g (Unboxed)

FEATURES

- KS-CP**
- Emergency Door Release design
 - Easy to operate
 - Use for secure override
 - Easy clean surface
 - Footprint for mounting onto flush back box

ALTERNATIVES

- KS-EDR-S (Single Pole EDR Key Switch)
- KS-EDR-D (Double Pole EDR Key Switch)
- KS-1 (Latching Operation)
- KS-2 (Momentary Operation)
- KS-3 (3 Position Key Switch)
- JMB/KS-1 (Latching Key Switch in Jamb Box)
- JMB/KS-3 (3 Position Key Switch in Jamb Box)
- WP-KS-1 or 2 (Weatherproof Key Switch)
- EXT/AP/KS-1, 2 or 3 (Architrave Extrusions KS)

CONTENTS

- KS-CP**
- Key Switch
 - Plastic Plate (2mm)
 - 2 x Keys (A126)
 - 2 Security Screws
 - Allen Key
 - Shrouded Surface Box

OTHER PRODUCTS

WP-KS-1



EXT/AP/KS-1



JMB/KS-1



KS-EDR-D



Manufactured by a BSIA Member